

Belt Conveyor Pull Rope Switch

PAS



APPLICATION

Kiepe pull-rope emergency stop switches type PAS are used in accordance with the requirements of EN 620 as well as BGI 710 and in conformity with DIN EN ISO 13850 as emergency stop devices as supplementary safety measures on conveyor belt systems and finishing and processing machines. The pull rope is tensioned on one side of the actuating shaft.

With the KIEPE pull-rope-system functionally aligned, the emergency stop signal can be triggered over a distance of 30 m with a maximum temperature variation of $\pm 20^{\circ}\text{C}$ in the application. Less temperature variation allows a longer installation length f.ex. for applications in production halls.

Kiepe pull rope emergency stop switches type PAS comply with Machinery Directive 2006/42/EG. The device must only be used in electrical control circuits.

The PAS plastic housing offers space for 1 SPDT and 1 N.C. contact. Taking into consideration the safety data and maintenance recommendations, the pull rope emergency stop switch type PAS can be used in safety circuits in accordance with **DIN EN ISO 13849 up to Performance Level e (PLe)**.


FUNCTION

The emergency stop signal can be activated by pulling or breaking of the pull wire or by pushing the blue emergency stop button when the switch is correctly adjusted. The spacer tool* helps to find the correct operating position for a proper work and has to be removed after adjustment.

The microswitches are actuated by a spring supported cam disc at the same time. The emergency stop signal is performed with positive-making normally closed (NC) contacts in accordance with the closed circuit principle.

After the emergency stop function is triggered, the switching mechanism is locked in the shut-off position "0". The blue reset button can only be removed to position "1", when the actuating shaft is back in operating position.

In position "1", the switching contacts are reactivated and the conveyor belt is prepared for start up the belt conveyor.

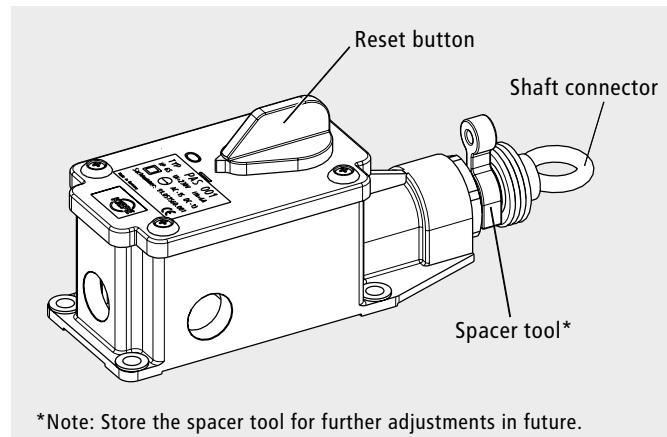

Note: Resetting the pull rope emergency stop switch must not cause in starting up the conveyor system.

TECHNICAL DATA

Designation	Pull rope emergency stop switch type PAS emergency stop device with latching function
Type of actuation	Unidirectional, for single-side pull rope installation, integrated wire-break detection
Complies with	DIN EN 60947-5-5; IEC 60947-5-5
Suited for	Control units and systems in accordance with DIN EN 60204
Pull rope length (with external spring)	depending on temperature fluctuations in application 1x 30m at 40 Kelvin 1x 50m at 25 Kelvin 1x 75m at 17 Kelvin
Mechanics	
Enclosure	Thermoplastic resin, yellow, similar to RAL 1004
Reset button	PARA, blue, similar to RAL 5010
Mounting	4 x M6
Net Weight (typic)	0.4 kg
Electrical System	
Switching system	Positive-opening snap-action switches; according DIN EN 60947-5-1; cam operated
Cable entries	3x M20x1.5 threaded holes with 1x cable gland (sealing $\varnothing 6\text{ mm} \dots \varnothing 12\text{ mm}$) 2x Dummy screw
Utilization category: U_e/I_e	AC-15: 230 V / 1,5 A DC-13: 24 V / 2,0 A
Connection cross section (max.)	2.5 mm ²
Protective conductor connection	Protection class II, Protective insulation
Rated insulation voltage U_i	AC 250 V
Rated impulse withstand voltage U_{imp}	2.5 kV, degree of pollution III
Conventional thermal current I_{th}	6 A

Ambient conditions in accordance with DIN EN 60947-5-5

Ambient temperature Protection	-25°C... + 70°C
Rating	IP 65 (EN 60529)

Reliability and Safety Data

electrical reliability	@ DC-13: 24 V / 2 A	B10d = 200,000 cycles
	@ AC-15: 230 V / 1,5 A	B10d = 840,000 cycles
mechanical reliability		840,000 cycles
Safety classification	DIN EN ISO 13849-1	Up to PLe
Depending upon system architecture	DIN EN 62061	Up to SIL3

SELECTION TABLE

Switch type			Part-No.
	N C	SPDT	
PAS 001	1	1	91.057 560.001
PAS 101, stainless	1	1	91.057 560.101

Spare parts and accessories

Cable gland M20 x 1.5 (Sealing range 6 mm ... 12 mm)		113.51.00.15.10
Dummy screw M20 x 1.5		113.43.87.15.01
Tension spring XL, 2,5m rope support distance		580.00.50.01.01
PAS Pull Rope Mounting Set complete (incl. spring XL, ##m Pull rope, supports; galv. steel)	20 m	95.302 953.103
	30 m	95.302 953.104
	10 m, 15 m	on request


MOUNTING

Pull-rope emergency stop switches of types PAS are each fastened to the substructure in installation position with 4x M6 screws.

Electrical connection is performed with the device open on a connector block, using the cable gland included in the delivery.

The pull rope **1** is connected to the shaft connector and the external spring **2** and has to be tensioned with spring and turnbuckle **4** till the spacer can be removed easily. This is the correct operating position.


MOUNTING DIAGRAM

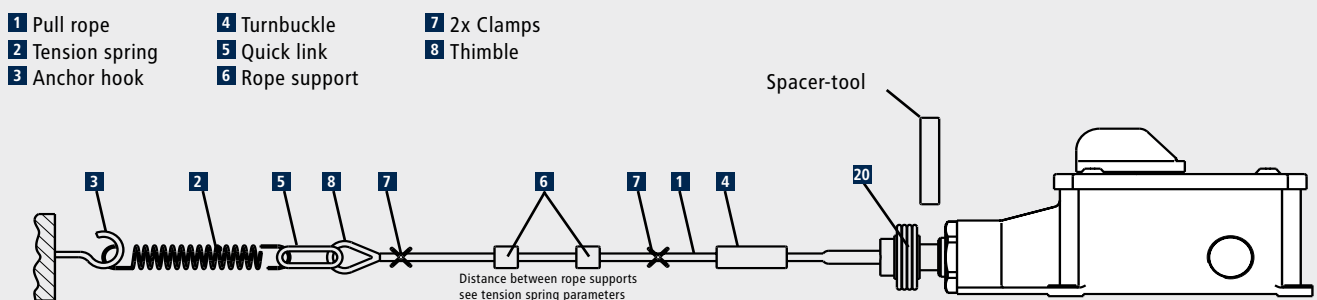

Note:

Fix the bellow seal **20** after removal of the spacer tool.

DIMENSIONS

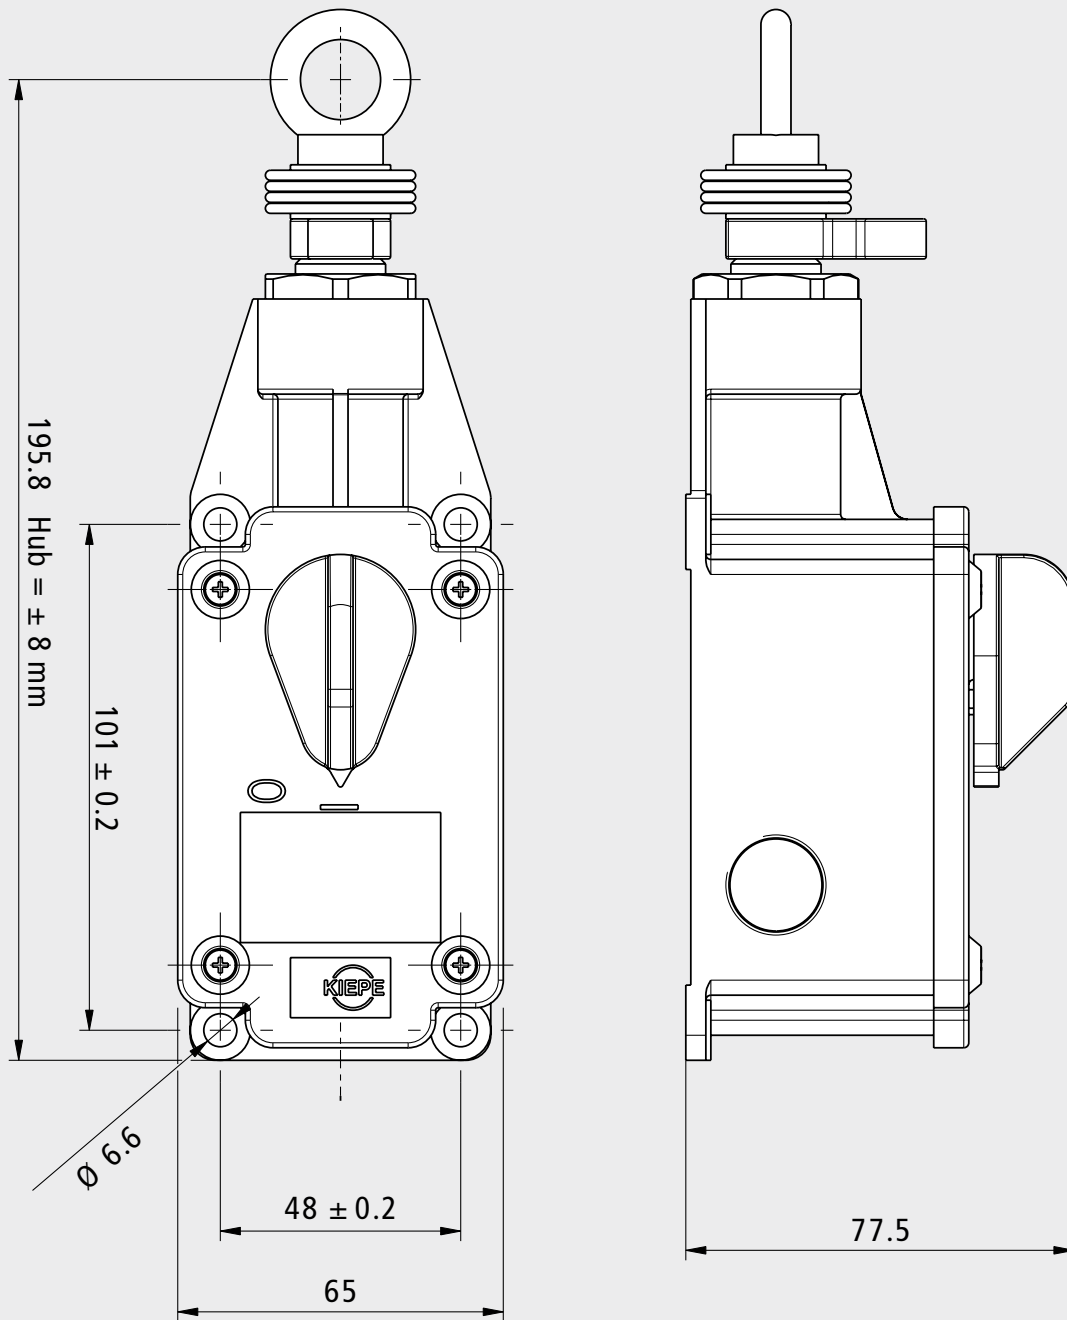

Subject to change without notice.

Kiepe Electric GmbH

40599 Düsseldorf (Germany) · Kiepe-Platz 1
Phone +49(0)211 74 97-0 · Fax +49(0)211 74 97-420
info@kiepe-elektrik.com · www.kiepe-elektrik.com

511/08-06/20